

GALAKSI O DIRECT

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaires Suspendus Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D`UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY
Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER
UV stabilized frosted diffuser.

CONVERTER
Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED
LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION
Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design

CORPS
Corps en aluminium anodisé, satiné. Design elégant. Couleurs blanc, noir disponibles.


DIFFUSEUR
Diffuseur givré. Anti UV.

CONVERTEUR
Converteur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant .

LED
Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION
Composé d`un fil en acier de 1mm , de composants en laiton nickelés. Livré avec un cordon electrique transparent et une boite de jonction electrique á fixer au plafond. Hauteur de fixation réglable.

IP 40 TS 8698 EN 60598-2-1

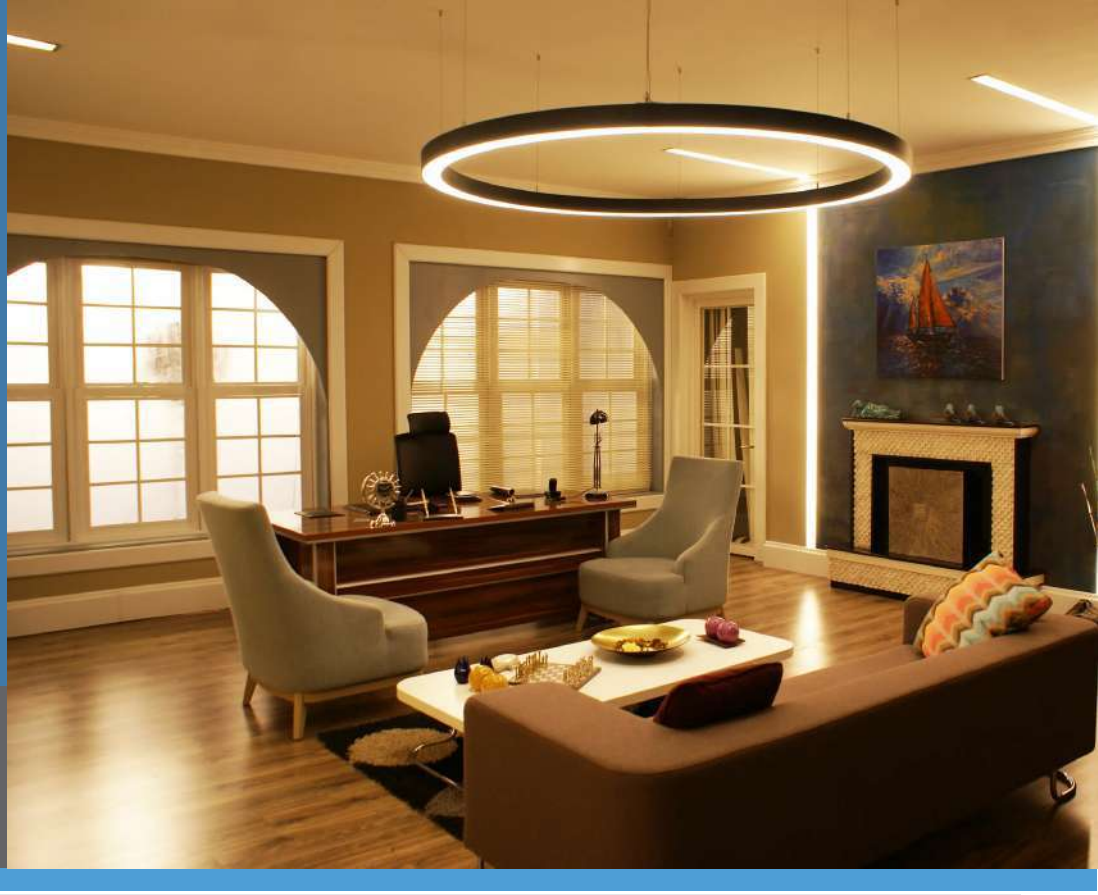



Color Options
Options de Couleur

LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Kod Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm) a	d	h	Weight Poids (kg)	Packing Quantity Colisage	Pcs./20´ Container Pcs./20´ Conteneur
PL8S04L15C	26	2835 SMD	PCB	2585	2700 - 6500	79	447	73	5,1	1	910
PL8S06L15C	39	2835 SMD	PCB	3880	2700 - 6500	79	620	73	6,0	1	550
PL8S06L25C	61	2835 SMD	PCB	5835	2700 - 6500	79	620	73	6,0	1	550
PL8S08L15C	53	2835 SMD	PCB	5170	2700 - 6500	79	800	73	7,7	1	340
PL8S08L25C	80	2835 SMD	PCB	7780	2700 - 6500	79	800	73	7,7	1	340
PL8S010L15C	66	2835 SMD	PCB	6460	2700 - 6500	79	980	73	10,7	1	230
PL8S010L25C	100	2835 SMD	PCB	9725	2700 - 6500	79	980	73	10,7	1	230
PL8S012L15C	79	2835 SMD	PCB	8210	2700 - 6500	79	1155	73	12,7	1	165
PL8S012L25C	120	2835 SMD	PCB	12315	2700 - 6500	79	1155	73	12,7	1	165
PL8S014L15C	92	2835 SMD	PCB	10240	2700 - 6500	79	1335	73	14,7	1	125
PL8S014L25C	140	2835 SMD	PCB	15360	2700 - 6500	79	1335	73	14,7	1	125
PL8S016L15C	105	2835 SMD	PCB	11705	2700 - 6500	79	1500	73	17,7	1	100
PL8S016L25C	160	2835 SMD	PCB	17560	2700 - 6500	79	1500	73	17,7	1	100
PL8S020L15C	132	2835 SMD	PCB	14630	2700 - 6500	79	1890	73	18,7	1	63
PL8S020L25C	200	2835 SMD	PCB	21945	2700 - 6500	79	1890	73	18,7	1	63
PL8S022L15C	145	2835 SMD	PCB	16100	2700 - 6500	79	2070	73	19,2	1	55
PL8S022L25C	221	2835 SMD	PCB	24150	2700 - 6500	79	2070	73	19,2	1	55
PL8S024L15C	158	2835 SMD	PCB	17560	2700 - 6500	79	2254	73	19,7	1	62
PL8S024L25C	240	2835 SMD	PCB	26340	2700 - 6500	79	2254	73	19,7	1	62





NOTE	NOTE
Lumen values are based on white body color measurements. Depending on different body colors lumen values may drop. For instance, there will be 5% drop for black body color.	Les valeurs de lumens sont basées sur des mesures de couleur de corps blanche. En fonction des différentes couleurs de corps, les valeurs de lumens peuvent diminuer. Par exemple, il y aura une baisse de 5% pour la couleur de corps noire.

