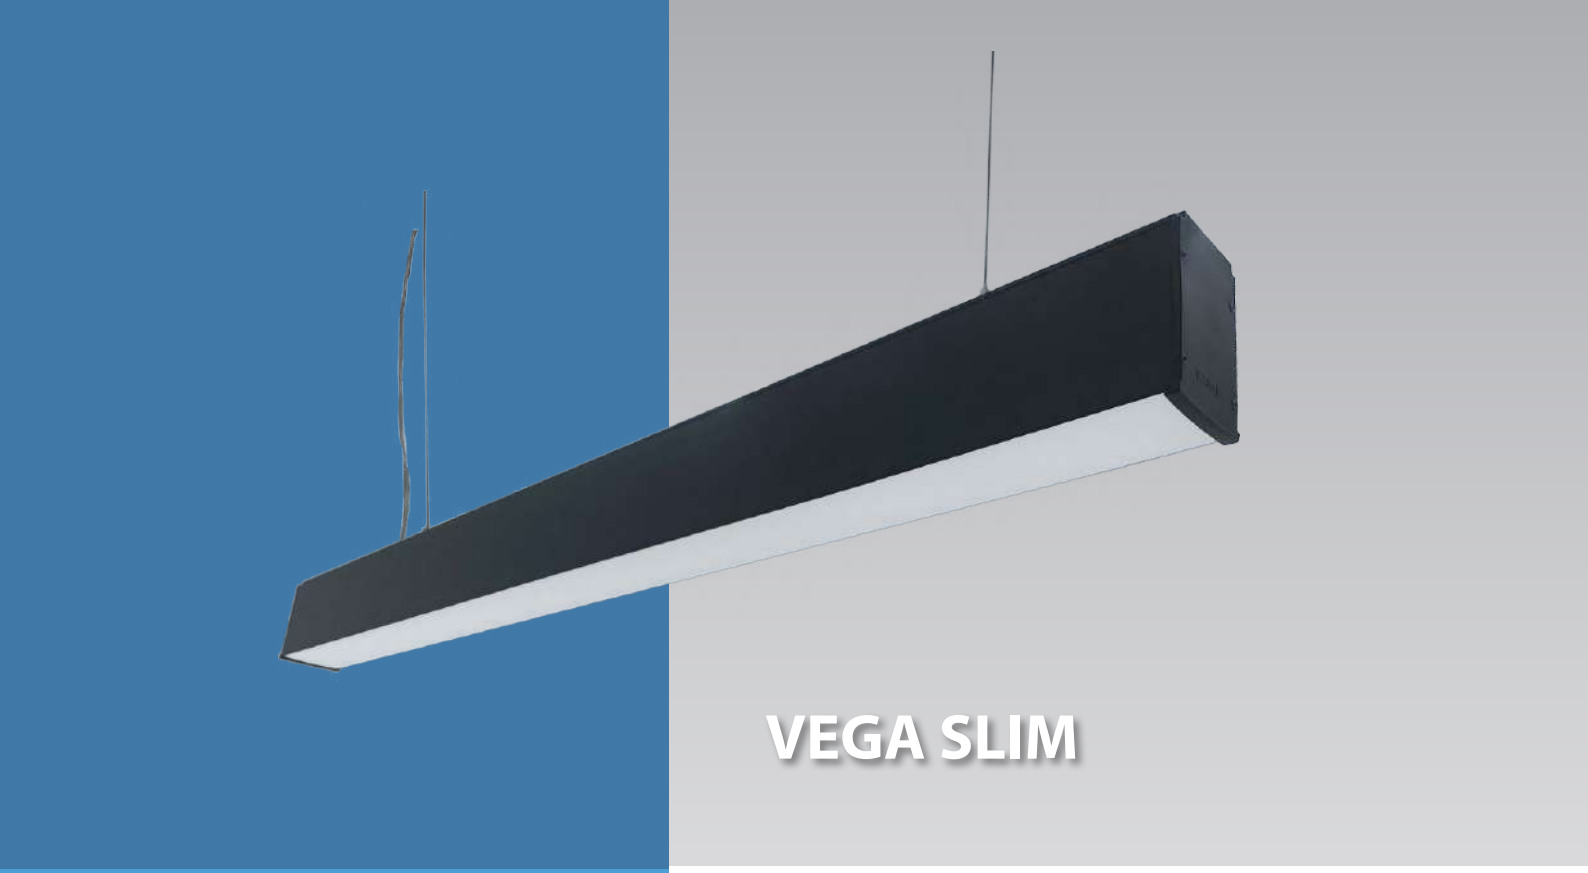


VEGA SLIM

LED

Suspended Lighting Fixtures With Diffuser

Luminaires Suspendus Avec Diffuseur

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D`UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY
Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER
UV stabilized extruded PC diffuser.

CONVERTER
Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED
LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION
Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design

CORPS
Corps en aluminium anodisé, satiné. Design elégant. Couleurs blanc, noir disponibles.

DIFFUSEUR
Diffuseur en PC extrudé stabilisé aux UV.

CONVERTEUR
Converteur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant .

LED
Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION
Composé d`un fil en acier de 1mm , de composants en laiton nickelés. Livré avec un cordon electrique transparent et une boite de jonction electrique á fixer au plafond. Hauteur de fixation réglable.

IP 40 TS 8698 EN 60598-2-1




Color Options
Options de Couleur


LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm) a	l	h	Weight Poids (kg)	Packing Quantity Colisage	Pcs./20″ Container Pcs./20″ Conteneur
PL13S12L15C	14	2835 SMD	PCB	1315	2700 - 6500	57	570	85	1.5	5	3635
PL13S12L25C	21	2835 SMD	PCB	1975	2700 - 6500	57	570	85	1.6	5	3635
PL13S13L15C	21	2835 SMD	PCB	1970	2700 - 6500	57	850	85	1.9	5	3635
PL13S13L25C	30	2835 SMD	PCB	2955	2700 - 6500	57	850	85	2.0	5	3635
PL13S14L15C	26	2835 SMD	PCB	2625	2700 - 6500	57	1130	85	2.3	5	2835
PL13S14L25C	41	2835 SMD	PCB	3940	2700 - 6500	57	1130	85	2.4	5	2835
PL13S15L15C	33	2835 SMD	PCB	3280	2700 - 6500	57	1412	85	2.7	5	2295
PL13S15L25C	51	2835 SMD	PCB	4920	2700 - 6500	57	1412	85	2.8	5	2295
PL13S16L15C	39	2835 SMD	PCB	3935	2700 - 6500	57	1693	85	3.1	5	1970
PL13S16L25C	61	2835 SMD	PCB	5905	2700 - 6500	57	1693	85	3.2	5	1970
PL13S17L15C	47	2835 SMD	PCB	4590	2700 - 6500	57	1973	85	3.5	5	1560
PL13S17L25C	70	2835 SMD	PCB	6885	2700 - 6500	57	1973	85	3.5	5	1560
PL13S18L15C	53	2835 SMD	PCB	5245	2700 - 6500	57	2254	85	3.9	5	1560
PL13S19L15C	60	2835 SMD	PCB	5900	2700 - 6500	57	2534	85	4.3	5	1255
PL13S10L15C	66	2835 SMD	PCB	6555	2700 - 6500	57	2815	85	4.7	5	1255

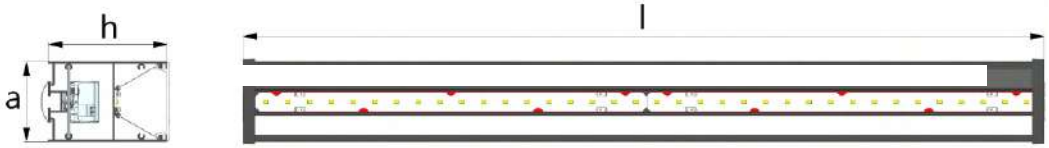

V / Hz	220 - 240 / 50 - 60

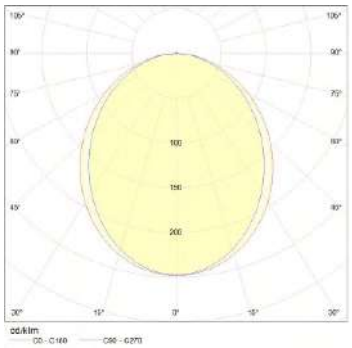

Options	Options
Dimmable electronic ballast or convertor. Emergency kit	Ballast electronique dimmable ou converteur. Kit d`urgence.

NOTE

Lumen values are based on white body color measurements. Depending on different body colors lumen values may drop. For instance, there will be 18% drop for black body color.

NOTE

Les valeurs de lumens sont basées sur des mesures de couleur de corps blanche. En fonction des différentes couleurs de corps, les valeurs de lumens peuvent diminuer. Par exemple, il y aura une baisse de 18% pour la couleur de corps noire.

NOTE	NOTE
Given lumen values are net delivered luminaire output lumens. Given power values are total consumed AC power of the luminaire.	Les valeurs de lumens données sont les lumens de sortie nets du luminaire. Les valeurs de puissance données sont la puissance AC totale consommée du luminaire.