



ELARA

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaire suspendu Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D'UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY

Anodized aluminum with satin finishing. Anthracite, Black and white color options with elegant design.

DIFFUSER

UV stabilized frosted diffuser.

CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED

LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION

Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design.

CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs gris anthracite, blanc, noir disponibles.

DIFFUSEUR

Diffuseur givré. Anti UV.

CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant.

LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION

Composé d'un fil en acier de 1mm, de composants en laiton nickelés. Livré avec un cordon électrique transparent et une boîte de jonction électrique à fixer au plafond. Hauteur de fixation réglable.


Color Options
Options de Couleur



LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Kod Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm) a d h			Weight Poids (kg)	Packing Quantity Colisage	Pcs./20" Container Pcs./20" Conteneur	Type of Luminaires Type de Luminaires
PL26S140S12T	17	2835 SMD	LED Strip	1400	2700 - 6500	330	63	730	1,3	1	1120	
PL26S160S12T	24	2835 SMD	LED Strip	2010	2700 - 6500	330	63	930	1,5	1	960	
PL26S180S12T	32	2835 SMD	LED Strip	2680	2700 - 6500	330	63	1130	1,6	1	880	
PL26S110S12T	40	2835 SMD	LED Strip	3410	2700 - 6500	330	63	1330	1,8	1	780	
PL26S112S12T	46	2835 SMD	LED Strip	3900	2700 - 6500	330	63	1530	1,9	1	560	
PL26S240S12T	34	2835 SMD	LED Strip	2800	2700 - 6500	330	63	730	2,8	1	560	
PL26S260S12T	48	2835 SMD	LED Strip	4020	2700 - 6500	330	63	930	3,1	1	480	
PL26S280S12T	64	2835 SMD	LED Strip	5360	2700 - 6500	330	63	1130	3,4	1	440	
PL26S210S12T	80	2835 SMD	LED Strip	6820	2700 - 6500	330	63	1330	3,7	1	390	
PL26S212S12T	92	2835 SMD	LED Strip	7800	2700 - 6500	330	63	1530	4,0	1	280	
PL26S340S12T	51	2835 SMD	LED Strip	4200	2700 - 6500	330	63	730	4,1	1	375	
PL26S360S12T	72	2835 SMD	LED Strip	6030	2700 - 6500	330	63	930	4,3	1	320	
PL26S380S12T	96	2835 SMD	LED Strip	8040	2700 - 6500	330	63	1130	4,5	1	295	
PL26S310S12T	120	2835 SMD	LED Strip	10230	2700 - 6500	330	63	1330	4,7	1	260	
PL26S312S12T	138	2835 SMD	LED Strip	11700	2700 - 6500	330	63	1530	4,9	1	190	

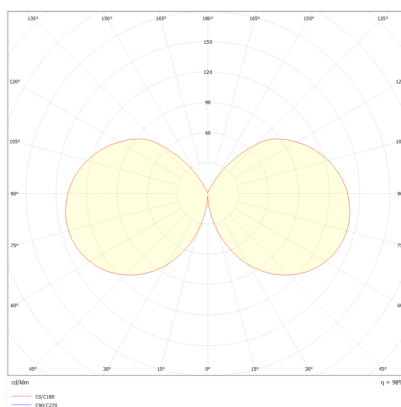

V / Hz 220 - 240 / 50 - 60

NOTE	NOTE
Given lumen values are net delivered luminaire output lumens.	Les valeurs de lumens données sont les lumens de sortie nets du luminaire.
Given power values are total consumed AC power of the luminaire.	Les valeurs de puissance données sont la puissance AC totale consommée du luminaire.